

# ER34615

LONG SING




## Specification


Nominal capacity (3mA discharge till cut off voltage 2.0V,@RT)	19Ah
Nominal Voltage	3.6V
Maximum Continuous Discharge	150mA
Maximum Pulse Current	300mA
Operating Temperature Range	-55°C~+85°C

Annual Average Capacity Reduction Rate	≤1%
Storage lifetime	10 years
Weight	100g
Lithium content	5.0g
Dimension	Φ32.7*H60.0mm


## Performance Data

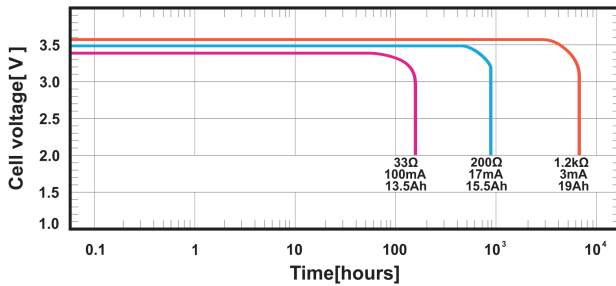

Typical Discharge Profiles at +23±2°C

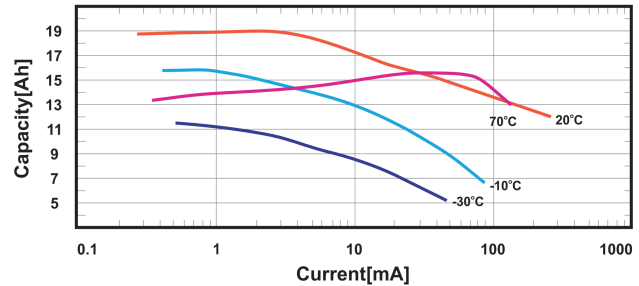

Capacity versus Current at various temperatures [ 2.0V cut-off ]

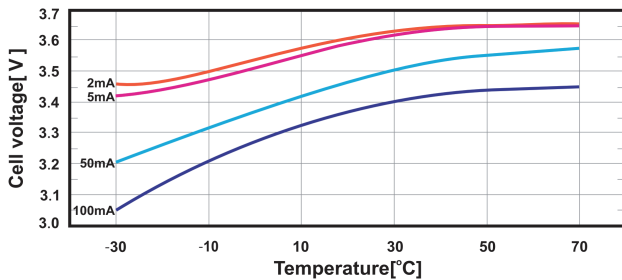

Voltage Plateau versus Current and Temperature

### Warning:

- Fire, explosion, and burn hazard.
- Do not recharge, short circuit, crush, disassemble, heat above 100°C(212°C), incinerate or expose contents to water.
- Do not solder directly to the cell (use tabbed cell versions instead).